


Держатели вала серии SHF

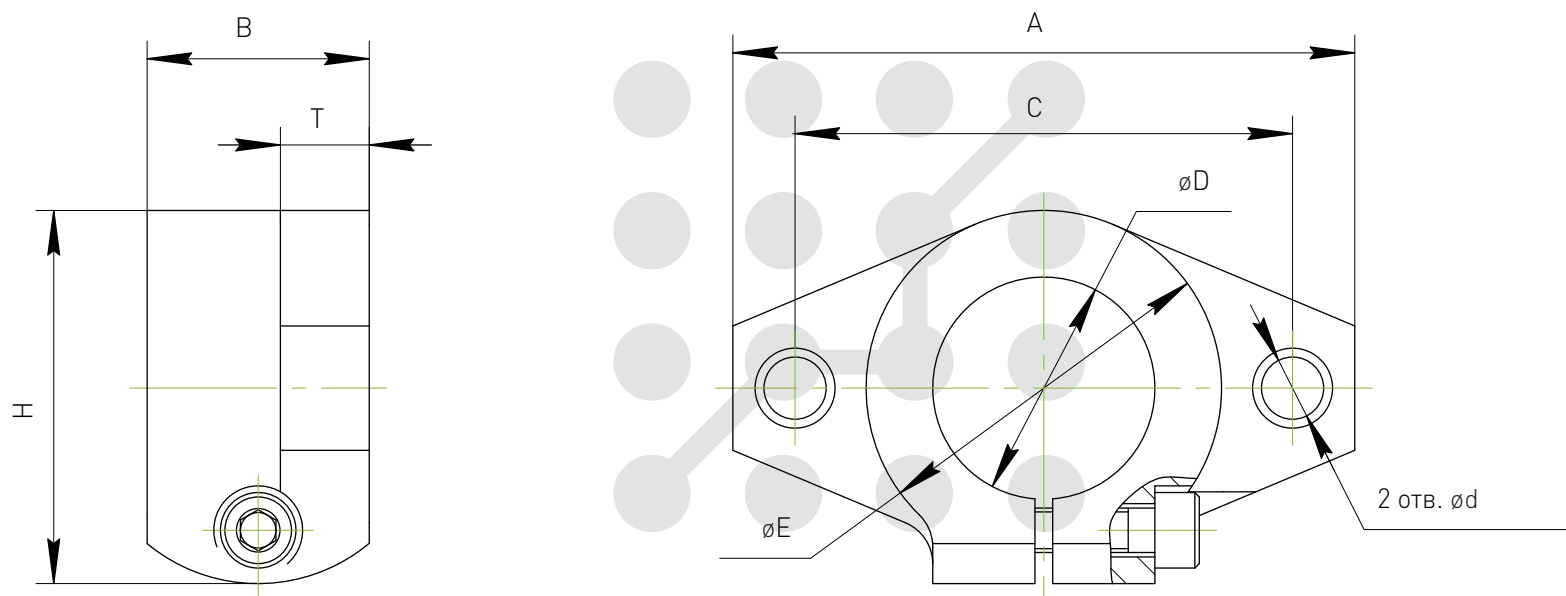

Единицы измерения: мм

| Обозначение | $\varnothing D$ | $\varnothing d$ | A* | B* | C | $\varnothing E$ | H | $h \pm 0.02$ | T | Масса, кг |
|-------------|-----------------|-----------------|-----|----|-----|-----------------|----|--------------|----|-----------|
| SHF-8 | 8 | 5.5 | 43 | 10 | 32 | | 24 | 24 | - | 0.013 |
| SHF-10 | 10 | 5.5 | 43 | 10 | 32 | | 24 | 24 | - | 0.013 |
| SHF-12 | 12 | 5.5 | 47 | 13 | 36 | 25 | 28 | 28 | 6 | 0.02 |
| SHF-16 | 16 | 5.5 | 50 | 16 | 40 | 28 | 31 | 31 | 8 | 0.027 |
| SHF-20 | 20 | 7 | 60 | 20 | 48 | 34 | 37 | 37 | 8 | 0.04 |
| SHF-25 | 25 | 7 | 70 | 25 | 56 | 40 | 42 | 42 | 10 | 0.06 |
| SHF-30 | 30 | 9 | 80 | 30 | 64 | 46 | 50 | 50 | 12 | 0.11 |
| SHF-35 | 35 | 12 | 92 | 35 | 72 | 50 | 58 | 58 | 14 | 0.38 |
| SHF-40 | 40 | 12 | 102 | 40 | 80 | 56 | 67 | 67 | 14 | 0.51 |
| SHF-50 | 50 | 14 | 122 | 50 | 96 | 70 | 83 | 83 | 19 | 0.89 |
| SHF-60 | 60 | 14 | 140 | 60 | 112 | 82 | 95 | 95 | 23 | 1.5 |

* - справочные размеры